

Lightwell *Skylights*

Australian Standard AS4285 – Skylight Certified.

Where simplicity and quality combine to provide effective natural lighting.

All you want is light but you need to be sure that you are purchasing a quality, reliable and proven product?


The Lightwell tubular skylight is your answer! With over 20 years servicing the Australian market, Lightwells design, performance and value for money speaks for itself.

Bring yourself out of the dark and into the light by installing a Lightwell skylight. Lightwells come with an injection moulded clear acrylic dome weight tested to 112kg which is fastened directly to a pressed “hi rise” metal flashing. The pressed flashing with its own single gutter system ensures water is directed away from the dome down the flashing and into the roof gutter of the home.

Lightwell is a Proven Performer at a budget price!!

No leaks and a product warranty under normal environmental operating conditions of 7 years.

Lightwell Skylights are available in 4 sizes (300mm, 350mm, 400mm and 500mm) with a high rise metal flashing to suit any room or roof type. (Tile, Corrugated, Deck or other)

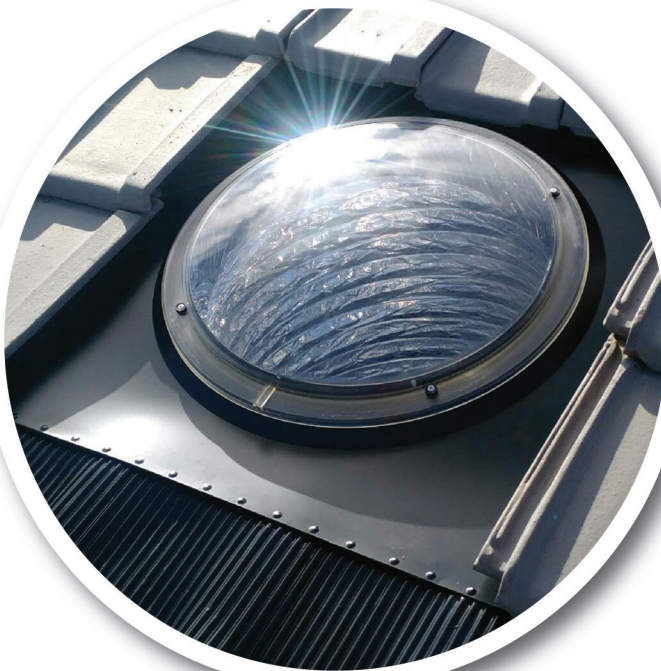

LIGHTWELL SKYLIGHTS SPECIFICATIONS

Steel Soaker Tray

Manufactured from 0.55mm gauge steel in Zincalume for metal roofs and can be painted to match Colorbond roof colours.

High Impact Acrylic Dome

Transparent U.V. stabilised grade 1 Acrylic injection moulded dome. Uniform thickness and strength - Passed AS4285-1995 testing @ 112kg live load.

360° Reflective Ring

The 0.45mm, 430 BA Grade mirror finish stainless steel ring is positioned on the inside of the breather frame to direct low angle sunlight down the shaft. Increasing the overall effect for a longer period during the day.

"Hi Rise" Centre

The pressed metal tray has a Hi Rise centre for structural strength and maximum water shedding properties.

Condensation Channel

The dome also includes a channel to allow any condensation to easily be released from the dome.

Tile Soaker Tray

The black .55 metal soaker tray for a tile roof is completed with a mouldable flashing pressed onto the front edge to edge of the tray.

Flexi-tube

Economical and efficient Flexi-tube. Designed specifically for use in skylights and manufactured for structural strength (tensile) and transmission efficiency.

Three layers of materials encapsulating a copper coated wire spline, Two layers of Matalised Polyester & one layer of Aluminium foil providing a finished thickness of 63 microns and 86% reflectivity.

This Flexi-tube also provides total light block out in the ceiling space.

Lower Reflective Ring

The 0.45mm, 430 BA Grade mirror finish stainless steel improves lower shaft light levels and acts as a securing point for the Flexi-tube.

Ceiling Frame

White Injection moulded ABS thermo plastic frame. Unobtrusive and neat on any ceiling.

Diffuser

Choice of P12 or P15 clear prismatic, Seadrift or flat opal. All designed to spread light and stop direct glare.

DISTRIBUTED IN AUSTRALIA BY:

CALIDAD
INDUSTRIES
ENERGY EFFICIENCY SOLUTIONS

Unit 1 / 40 Inspiration Drive,
Wangara, 6065, Western Australia.

Ph: (08) 9302 6622 Fx: (08) 9302 6007

Email: sales@calidad.net.au

Web: www.calidad.net.au

STANDARDS
Australia



Contact your local Distributor:

